Oil Cooler (for Cooling Pump Drainage)



Nomenclature

DCR	* *	В	_	10	
1	2	3		4	

1 Model No.

DCR: Oil cooler (for cooling pump drainage)

2 Cooler capacity

10: Type 10 20: Type 20 3 Piping port *1

B: connection port Rc3/8

4 Design No. (The design No. is subject to change.)

Note: *1 The NDR08 and NDR15 series rotor packs use dedicated oil coolers which have different piping port shapes from other oil coolers.

Specifications

Oil usable	Petroleum-based hydraulic fluid			
Oil temperature	0 to 90°C			
Atmosphere	Inside factory			
Operating temperature range	0 to 40°C			
Operating humidity range	20 to 85%RH (no condensation)			
Passing flow rate L/min	4 maximum			
Maximum operating pressure MPa {kgf/cm²}	0.1 {1}			
Power supply voltage	1-phase AC 200 V (50 Hz), AC 200 V (60 Hz), AC 220 V (60 Hz)			
Permissible voltage fluctuation	90 to 110%			

Fan motor electrical rating


Model code	Voltage V	Frequency Hz	Operating current A	Input W	Locked current A	Starting current A	Coil and protection type	Lead wire
	200	50	0.120	16.0	0.170	0.170	Shading coil type (with impedance protector)	Heat resisting flat two-core vinyl cable • Length: 1 m • External dimensions: 5.4 × 2.7 mm • Wire diameter: 0.75 mm²
DCR10B-10	200	60	0.110	15.0	0.150	0.150		
	220	60	0.100	17.6	0.180	0.180		
	200	50	0.260	36.0	0.350	0.350	Shading coil type (with thermal protector)	Length: 1 m Wire diameter: AWG22 (equivalent to 0.3 mm2) Sheath: PVC tube No. 4
DCR20B-10	200	60	0.220	31.0	0.310	0.310		
	220	60	0.239	39.1	0.330	0.330		


Note: Install a 0.5 A circuit breaker to prevent damage at short-circuiting.

https://www.daikinpmc.com/en/

For latest information, PDF catalogs and operation manuals

Oil cooler performance curves

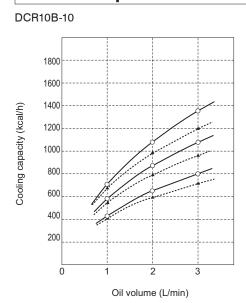

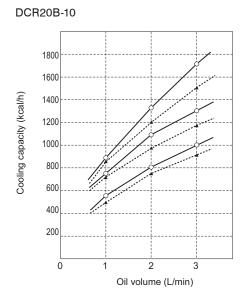


The lines in the graph have the following meanings.

○---- : 60 Hz ▲----- : 50 Hz

Top: 50°C Difference between Middle: 40°C room temperature and inlet oil temperature Bottom: 30°C

External dimension diagram

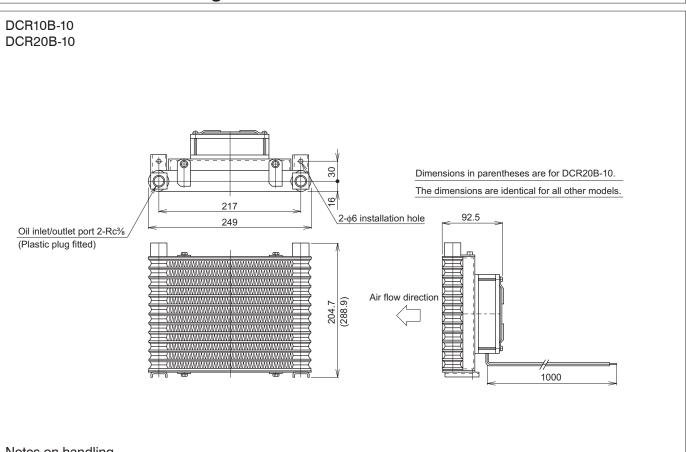

Notes on handling

In the piping work, tighten Rc% taper threads at a tightening torque of 28.5 to 33 N·m while holding the square boss still with a spanner.